


CAUTION! CAUTION!

The following must be carried out before the machine is folded out for the first time:

The side levelling plates and the side support wheels must be removed and reattached as described below.

Furthermore before the first use or before the first time the machine is folded out, all of the supplied parts that are tied down on the tine frames must be removed.

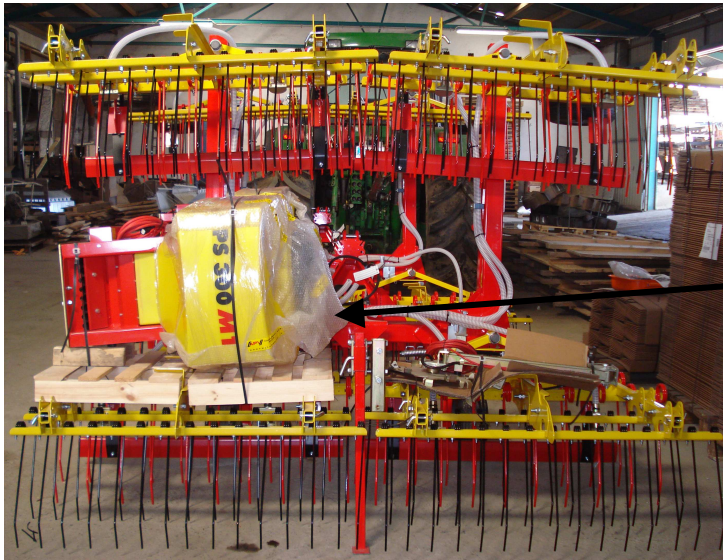

- ✓ Withdraw the PS from the machine
- ✓ Remove accessories (if present)
- ✓ Remove transport material
- ✓ Remove the cable ties on the tine frames



- ✓ Detach the side levelling plates
 - ✓ Pull the side support wheels out of the bracket.
 - ✓ Unfold machine
- ATTENTION!** Pay attention to the warning signs and ladder (if present)



- ✓ Fit side support wheels (see fig.)
- ✓ Fit side levelling plates as shown in photo

✓ Turn swing limiter around



Delivery position



Working position



- ✓ Fit PS
- ✓ Fit PS hoses (2 off) to the side tine frames
- ✓ Connecting lighting cable (if warning signs present)
- ✓ The right to make technical changes is reserved.